



LW 265 R

Telescopic lifter

Weight and load capacity:

Weight:
93.4 kg.
Minimum load:
25 kg.
Maximum load:
220 kg.

Min. and max. height:

Minimum height:
1.80 m.
Maximum height:
6.50 m.

Dimensions:

Diameter:
40 mm.
Unfolded base dimensions:
1.79 x 1.79 m.
Folded base dimensions:
0.46 x 0.46 m.


Two colours available:



LW 265 R



LW 265 R B

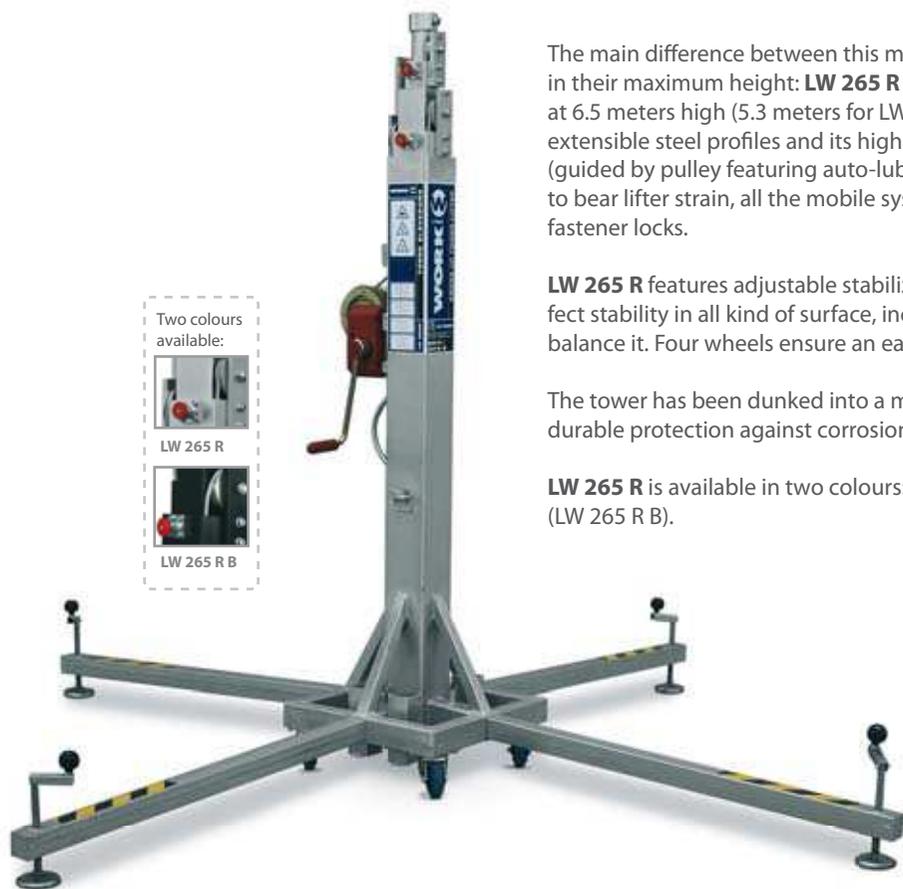

The main difference between this model and the LW 255 R lies in their maximum height: **LW 265 R** can lift loads of 220 kg at 6.5 meters high (5.3 meters for LW 255 R) thanks to its five extensible steel profiles and its high traction resistant cable (guided by pulley featuring auto-lubricated bearing). In order to bear lifter strain, all the mobile system is fixed with safety fastener locks.

LW 265 R features adjustable stabilizers on its legs for a perfect stability in all kind of surface, including a bubble level to balance it. Four wheels ensure an easy use and transport.

The tower has been dunked into a melting bath of zinc for a durable protection against corrosion and oxidation.

LW 265 R is available in two colours: silver metal and black (LW 265 R B).



High resistance stabilizer legs with rubber made base.



For more convenience during transport, stabilizer legs are put in the space provided.



Four wheels have been added at the base of the lifter to move it easily.



LW 265 R features a bubble level vial, useful to balance the lifter and ensures vertical lifting, protecting load from unexpected movements.



Pulley system and safety pin on each section. Vertex with reinforcement.



LW 255 R, LW 265 R and LW 290 R feature a strong, high quality automatic brake winch that allows heavy load lifting. It has been designed according to the VGB 8/10.93 norm.



Ø 40 mm

Accessories

AW 140 / AW 240 / AW 340 / AW 540 / AW 440 / AW 20 / AW 12

See more details about our accessories pg. 36-37.



Cable and winch

Cable:
Composition: 6 x 19+1.
Diameter: 6 mm.
Resistance: 1770 N / mm2.
Winch:
Drum diameter capacity: 48 mm.
Reduction range: 3.75 : 1.



Features

- Five extensible steel profiles.
- Four wheels at the base of the lifter + handle for a convenient transport.
- Dunked into a melting bath of zinc for a durable protection against corrosion and oxidation.
- 40 mm diameter / suitable with many accessories.
- Colour available: Silver metal and black.



Norms / Certificates

Lifter:
CE · BGV C1
Winch:
VGB 8/10.93;
89/392/EWG;
98/37/EG.